




USS Through Hard Washer USS高强度垫圈

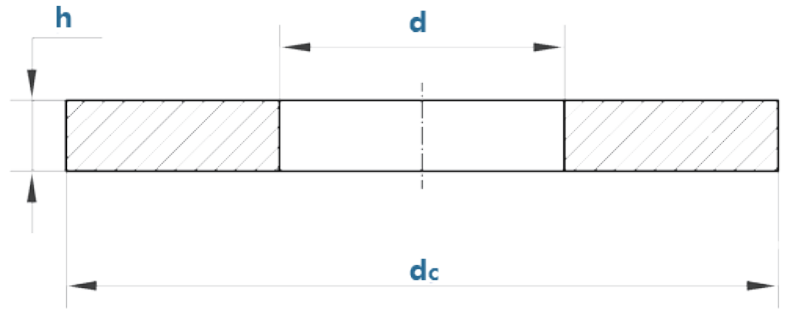

Size	d		dc		h		per 1000 units
	Min	Max	min	max	min	max	kg
1/4	7.8	8.31	18.47	19.02	1.3	2.03	3.09
5/16	9.4	9.91	22.05	22.99	1.63	2.64	5.79
3/8	11	11.51	25.22	26.16	1.63	2.64	7.41
7/16	12.57	13.08	31.57	32.51	1.63	2.64	11.83
1/2	14.15	14.66	34.75	35.69	2.18	3.35	18.32
9/16	15.75	16.26	37.13	38.07	2.18	3.35	20.51
5/8	16.48	17.45	44.27	45.21	2.74	4.06	37.19
3/4	20.45	21.39	50.62	51.56	3.1	4.5	52.46
7/8	23.65	24.59	56.97	57.91	3.45	4.88	71.77
1	26.8	27.74	63.32	64.26	3.45	4.88	87.62
1-1/8	31.57	32.51	69.67	70.61	3.45	4.88	102.45
1-1/4	34.75	35.69	76.02	76.96	3.45	4.88	121.11
1-1/2	41.02	42.42	88.65	90.04	3.45	5.41	175.58